

FOND DU LAC LEDGESTONE

Application	Available	Recommended for Interior Use	Recommended for Exterior Use
Full Bed Depth Veneer (±4")	No	Yes	Yes
Thin Veneer (±1")	Yes	Yes	Yes
Thin Veneer Corners	Yes	Yes	Yes

ASTMs

ASTM C-97 • Absorption & Bulk Specific Gravity

Water Absorption %	.31
Bulk Specific Gravity	2.83

ASTM C-170 • Compressive Strength

Parallel to Rift, Dry	36,100 psi
Parallel to Rift, Wet	32,000 psi
Perpendicular to Rift, Dry	35,800 psi
Perpendicular to Rift, Wet	30,000 psi







ASTM C-99 • Modulus of Rupture


Parallel to Rift, Dry	3,770 psi
Parallel to Rift, Wet	3,500 psi

ASTM C-880 • Flexural Strength

Perpendicular to Rift, Dry	1,780 psi
Perpendicular to Rift, Wet	1,730 psi

SPECIFICATIONS

 100% BEDFACE
 PATTERN Sawn Course Heights Dimensional Tight-Fit
 HEIGHT Dimensional: 2.25" • 5" (Thin Veneer Only)
 LENGTH Random, from 4"-16" (Thin Veneer Only)
 COVERAGE N/A
 COLOR Light and warm medium grays

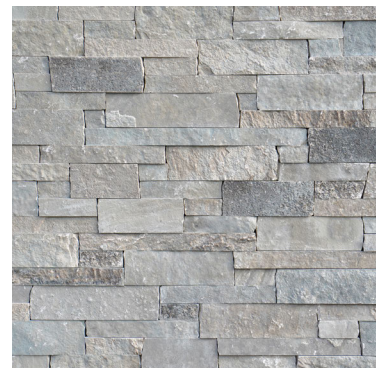

GOLD FABRICATOR
 ANSI/NSC 373-2013
 C0289215-101



GOLD QUARRIER
 ANSI/NSC 373-2013
 C0290908-101



Bronze Ledgestone™

Architectural Specifications:

Heights:	2-1/2"
Lengths:	4" - 14"
Depths:	1/2" - 3/4"
Weight:	10 pounds per square ft
Colors:	Beige, Bronze, Brown, Tan
Flats:	5 s/f Bag, 10 s/f Box, 120/180/200 s/f Crat
Corners:	5 l/f Bag, 10 l/f Box, 100 l/f Crate